

|  |  |  |  |   |  |
|--|--|--|--|---|--|
| FORM PTO-1390<br>(REV. 5-93)   |  | U.S. DEPARTMENT OF COMMERCE<br>PATENT AND TRADEMARK OFFICE   |  | ATTORNEY'S DOCKET NUMBER<br>10191/1883                    |  |
| TRANSMITTAL LETTER TO THE UNITED STATES<br>DESIGNATED/ELECTED OFFICE (DO/EO/US)<br>CONCERNING A FILING UNDER 35 U.S.C. 371   |  |  |  | U.S. APPLICATION NO. (If known, see 37 CFR 1.5)           |  |
|  |  |  |  | 09/856906   |  |
| INTERNATIONAL APPLICATION NO.<br>PCT/DE00/03422  |  | INTERNATIONAL FILING DATE<br>28 September 2000<br>(28.09.00) |  | PRIORITY DATE CLAIMED:<br>29 September 1999<br>(29.09.99) |  |
| TITLE OF INVENTION<br>FUEL INJECTOR  |  |  |  |   |  |
| APPLICANT(S) FOR DO/EO/US<br><b>Hubert STIER</b>   |  |  |  |   |  |
| Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.  |  |  |  |   |  |
| 1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.<br>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.<br>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).<br>4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.<br>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))<br>a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).<br>b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.<br>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)<br>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).<br>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))<br>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).<br>b. <input type="checkbox"/> have been transmitted by the International Bureau.<br>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.<br>d. <input checked="" type="checkbox"/> have not been made and will not be made.<br>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).<br>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (unsigned).<br>10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).<br><b>Items 11. to 16. below concern other document(s) or information included:</b><br>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.<br>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.<br>13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.<br>14. <input checked="" type="checkbox"/> A substitute specification.<br>15. <input type="checkbox"/> A change of power of attorney and/or address letter.<br>16. <input checked="" type="checkbox"/> Other items or information: International Search Report (translated), and PCT/RO/101. |  |  |  |   |  |

EXPRESS MAIL NO.: EL245834291US

097/856906

INTERNATIONAL APPLICATION NO  
PCT/DE00/03422JC18 Rec'd PCT/PTO 29 MAY 2001  
ATTORNEY'S DOCKET NUMBER  
10191/188317. ☒ The following fees are submitted:**Basic National Fee (37 CFR 1.492(a)(1)-(5)):**Search Report has been prepared by the EUROPEAN PATENT OFFICE or  
JPO ..... \$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... \$690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but  
international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... \$710.00Neither international preliminary examination fee (37 CFR 1.482) nor international search  
fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$1,000.00International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims  
satisfied provisions of PCT Article 33(2)-(4) ..... \$100.00

CALCULATIONS | PTO USE ONLY

**ENTER APPROPRIATE BASIC FEE AMOUNT =** \$ 860Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 CFR 1.492(e)). \$

| Claims                                      | Number Filed | Number Extra | Rate       |      |  |
|---|--------------|--------------|------------|------|--|
| Total Claims                                | 11 - 20 =    | 0            | X \$18.00  | \$ 0 |  |
| Independent Claims                          | 2 - 3 =      | 0            | X \$80.00  | \$ 0 |  |
| Multiple dependent claim(s) (if applicable) |              |              | + \$270.00 | \$   |  |

**TOTAL OF ABOVE CALCULATIONS =** \$ 860Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must  
also be filed. (Note 37 CFR 1.9, 1.27, 1.28). \$**SUBTOTAL =** \$ 860Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)). + \$**TOTAL NATIONAL FEE =** \$ 860Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property + \$**TOTAL FEES ENCLOSED =** \$ 860Amount to be:  
refunded \$  
charged \$a. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the above fees is enclosed.b. ☒ Please charge my Deposit Account No. 11-0600 in the amount of **\$860.00** to cover the above fees. A duplicate copy of this sheet  
is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit  
Account No. 11-0600. A duplicate copy of this sheet is enclosed.**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be  
filed and granted to restore the application to pending status.SEND ALL CORRESPONDENCE TO:  
Kenyon & Kenyon  
One Broadway  
New York, New York 10004

SIGNATURE

Richard L. Mayer, Reg. No. 22,490  
NAME

DATE



26646

PATENT TRADEMARK OFFICE

09/856906

JC18 Rec'd PCT/PTO 29 MAY 2001

[10191/1883]

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

- Applicant(s) : Hubert STIER  
Serial No. : To Be Assigned  
Filed : Herewith  
For : FUEL INJECTOR  
Art Unit : To Be Assigned  
Examiner : To Be Assigned

Assistant Commissioner  
for Patents  
Washington, D.C. 20231  
Box Patent Application

**PRELIMINARY AMENDMENT AND  
37 C.F.R. § 1.125 SUBSTITUTE SPECIFICATION STATEMENT**

SIR:

Please amend the above-identified application before examination, as set forth below.

**IN THE SPECIFICATION AND ABSTRACT:**

In accordance with 37 C.F.R. § 1.121(b)(3), a Substitute Specification (including the Abstract, but without claims) accompanies this response. It is respectfully requested that the Substitute Specification (including Abstract) be entered to replace the Specification of record.

**IN THE CLAIMS:**

On the first page of the claims, first line, change "What is claimed is:" to:  
--What Is Claimed Is:--.

Please cancel original claims 1 to 6, without prejudice, in the underlying PCT  
Application No. PCT/DE00/03422.

EL245834291US

09/856906 - 102301

Please add the following new claims:

7. (New) A fuel injector for a fuel injection system of an internal combustion engine, comprising:

a solenoid coil;

a first resetting spring;

a second resetting spring;

an armature that can be acted upon by the solenoid coil in a stroke direction in opposition to the first resetting spring, the armature being acted upon by the second resetting spring;

a valve-closure member;

a valve needle connected to the valve-closure member and including a first limit stop for the armature;

a valve seat cooperating with the valve-closure member;

a connecting part formed of a magnetic material and on which is supported the valve seat;

a stationary second limit stop configured on the connecting part and provided for the armature; and

a magnetic restricter disposed in a vicinity of the stationary second limit stop and arranged on at least one of the connecting part and the armature, wherein:

the second resetting spring acts upon the armature contrary to the stroke direction, and

in a resting position when the solenoid coil is not excited, the second resetting spring holds the armature in position at the stationary second limit stop such that the armature is positioned at a preestablished distance from the first limit stop, configured on the valve needle.

8. (New) The fuel injector according to claim 7, wherein:

the fuel injector is for directly injecting a fuel into a combustion chamber of the internal combustion engine.

9. (New) A fuel injector for a fuel injection system of an internal combustion engine, comprising:
  - a solenoid coil;
  - a first resetting spring;
  - a second resetting spring;
  - an armature that can be acted upon by the solenoid coil in a stroke direction in opposition to the first resetting spring, the armature being acted upon by the second resetting spring;
  - a valve-closure member;
  - a valve needle connected to the valve-closure member and including a first limit stop for the armature;
  - a valve seat cooperating with the valve-closure member;
  - a connecting part formed of a non-magnetic material and on which is supported the valve seat; and
  - a stationary second limit stop configured on the connecting part and provided for the armature, wherein:
    - the second resetting spring acts upon the armature contrary to the stroke direction, and
    - in a resting position when the solenoid coil is not excited, the second resetting spring holds the armature in position at the stationary second limit stop such that the armature is positioned at a preestablished distance from the first limit stop, configured on the valve needle.
10. (New) The fuel injector according to claim 9, wherein:
  - the fuel injector is for directly injecting a fuel into a combustion chamber of the internal combustion engine.
11. (New) The fuel injector according to claim 7, further comprising:
  - an armature guide integrated in the connecting part, wherein:
    - the stationary second limit stop is integrated in the connecting part.

12. (New) The fuel injector according to claim 9, further comprising:  
an armature guide integrated in the connecting part, wherein:  
the stationary second limit stop is integrated in the connecting part.
13. (New) The fuel injector according to claim 11, further comprising:  
an external pole, wherein:  
the armature cooperates with the external pole, the armature guide, and the stationary second limit stop.
14. (New) The fuel injector according to claim 12, further comprising:  
an external pole, wherein:  
the armature cooperates with the external pole, the armature guide, and the stationary second limit stop.
15. (New) The fuel injector according to claim 7, wherein:  
the magnetic restricter is arranged at a periphery of a segment of the armature that is aligned with the valve needle.
16. (New) The fuel injector according to claim 7, further comprising:  
an external pole; and  
a casing formed of a non-magnetic material and arranged between the connecting part and the external pole.
17. (New) The fuel injector according to claim 9, further comprising:  
an external pole; and  
a casing formed of a non-magnetic material and arranged between the connecting part and the external pole.

Remarks

This Preliminary Amendment cancels original claims 1 to 6 without prejudice, in the underlying PCT Application No. PCT/DE00/03422. The Preliminary Amendment also adds new claims 7-17. The new claims conform the claims to U.S. Patent and Trademark Office rules and do not add new matter to the application.

In accordance with 37 C.F.R. § 1.121(b)(3), the Substitute Specification (including the Abstract, but without the claims) contains no new matter. The amendments reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to U.S. Patent and Trademark Office rules or to correct informalities. As required by 37 C.F.R. § 1.121(b)(3)(iii) and § 1.125(b)(2), a Marked Up Version Of The Substitute Specification comparing the Specification of record and the Substitute Specification also accompanies this Preliminary Amendment. Approval and entry of the Substitute Specification (including Abstract) are respectfully requested.

The underlying PCT Application No. PCT/DE00/03422 includes an International Search Report, dated February 8, 2001, a copy of which is submitted herewith.

Applicant asserts that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Respectfully Submitted,

KENYON & KENYON

By: Richard L. Mayer (Reg. No. 41,122)

Dated: 5/29/01

By: Richard L. Mayer  
Richard L. Mayer  
(Reg. No. 22,490)

One Broadway  
New York, NY 10004  
(212) 425-7200

## FUEL INJECTOR

Field Of The Invention

The present invention relates to a fuel injector.

5

Background Information

German Published Patent Application No. 33 14 899 describes an electromagnetically actuable fuel injector, in which an armature cooperates with an electrically excitable solenoid coil for the purpose of electromagnetic actuation, and the stroke of the armature is transmitted via a valve needle to a valve-closure member. The valve-closure member cooperates with a valve seat. The armature is not fixedly mounted on the valve needle but rather the armature is arranged so as to be axially movable with respect to the valve needle. A first resetting spring acts upon the valve needle in the closing direction and therefore keeps the fuel injector closed in the currentless, non-excited state of the solenoid coil. The armature, via a second resetting spring, is acted upon in the stroke direction such that the armature, in the resting position, contacts a first limit stop that is provided on the valve needle. When the solenoid coil is excited, the armature is pulled in the stroke direction and, as a result of the first limit stop, takes the valve needle with it. When the current exciting the solenoid coil is switched off, the valve needle is accelerated into its closed position by the first resetting spring, taking the armature with it as a result of the above-mentioned limit stop. As soon as the valve-closure member strikes against the valve seat, the closing motion of the valve needle is abruptly ended. The armature, which is not fixedly joined to the valve needle, continues to move in the stroke direction and the motion is absorbed by the second resetting spring, i.e., the armature swings through against a second resetting spring, which has a significantly lower spring constant than the first resetting spring. Finally, the second resetting spring accelerates the armature once again in the stroke direction. If the armature strikes against the limit stop of the valve needle, the can result in the valve-closure member, which is connected to the valve needle, once again briefly lifting off from the valve seat, therefore generating a short-term opening of the fuel injector. The debouncing in the fuel injector

20

25



known from German Published Patent Application No. 33 14 899 is therefore imperfect. In addition, it is disadvantageous both in a conventional fuel injector, in which the armature is fixedly connected to the valve needle, as well as in the fuel injector known from German Published Patent Application No. 33 14 899, that the opening stroke of the valve needle begins immediately as soon as the magnetic force exerted by the solenoid coil on the armature exceeds the sum of the forces acting in the closing direction, i.e., the spring closing force exerted by the first resetting spring and the hydraulic forces of the fuel, which is under pressure. This is disadvantageous to the extent that, when the current exciting the solenoid coil is switched on, the magnetic force has not yet reached its final value due to the self-induction of the solenoid coil and the eddy currents that arise. At the beginning of the opening stroke, the valve needle and the valve-closure member are therefore accelerated at a reduced force. This leads to an opening time that is not satisfactory for all application cases.

In U.S. Patent No. 5,299,776, it is proposed, in this regard, not to connect the armature fixedly to the valve needle but rather to allow the armature a certain axial freedom of motion on the valve needle. However, in this embodiment, the axial position of the armature, in the resting position of the fuel injector, is not defined, and therefore, in the fuel injector known from this publication, the response time is uncertain when the exciting current is switched on.

#### Summary Of The Invention

In contrast, the fuel injector according to the present invention has the advantage that the fuel injector is debounced in a satisfactory manner and, additionally, that it has an extremely small opening time. Because of the immediate limit stop on the connecting part, an adjusting or guide disk can be dispensed with. The enlarged guide diameter generates improved guide properties, i.e., the valve needle is less sensitive to tilting or jamming. As a result of the fact that the guide is closer on the armature, the moments are reduced.

As a result of the fact that the second resetting spring holds the armature in the resting position of the fuel injector not at the first limit stop provided on the valve needle but at a stationary second limit stop at a distance from the first limit stop of the valve needle, it is achieved, when the fuel injector is closed, that the armature is not accelerated once again in

the stroke direction by the second resetting spring. When the fuel injector is closed, the motion of the valve needle is abruptly ended if the valve-closure member comes into contact with the valve seat, as a result of the acceleration by the first resetting spring. In the fuel injector according to the present invention, the motion of the armature also continues in the closing direction, i.e., contrary to the stroke direction, until the armature has reached the second limit stop. If the armature rebounds from the second limit stop, it is nevertheless once again accelerated by the second resetting spring, contrary to the stroke direction, and the armature is prevented once again from reaching the first limit stop on the valve needle and therefore from carrying the valve needle with it in the opening direction. As a result of the second resetting spring, the armature is held at a distance from the first limit stop provided on the valve needle until the armature is once again accelerated in the stroke direction by the solenoid coil as a consequence of the next current pulse exciting the solenoid coil.

A further advantage of the fuel injector lies in the fact that the armature initially experiences a preacceleration before reaching the first limit stop provided on the valve needle, i.e., before carrying the valve needle with it. In this manner, the armature received an impulse, which it transmits to the valve needle, even before carrying the valve needle with it. In comparison to a fuel injector in which the armature is fixedly connected to the valve needle or a fuel injector in which the armature is movable with respect to the valve needle but in the resting position contacts the limit stop of the valve needle, a substantially shorter opening time and therefore a more precise metering of the fuel is achieved. A further effect that shortens the opening time arises from the fact that the magnetic force exerted on the armature is initially reduced when the current pulse exciting the solenoid coil is switched on, due to the self-induction of the solenoid coil and the eddy currents excited by the solenoid coil. If the distance is appropriately dimensioned between the second limit stop, at which the armature is positioned in its resting position, and the first limit stop, which acts to carry the valve needle with it, it can therefore be achieved that, when the armature strikes the first limit stop of the valve needle, so much time has already passed that the magnetic force has reached its final constant value. Therefore, as a result of the added flight time of the armature, a time delay is achieved which significantly shortens the subsequent opening time of the fuel injector.

In the connecting part executed as the valve seat support, it is possible to integrate both an

armature guide as well as a second limit stop. In this context, however, in a first peripheral area, the valve seat support having the armature guide can be configured not having the second limit stop, and in a second peripheral area, it can be configured as having the second limit stop but not having the anchor guide. As a result of the functional separation of limit stop and anchor guide, the requirements with respect to manufacturing precision are less stringent.

To prevent a magnetic short-circuit, the magnetic restricter is preferably arranged in the area between the second limit stop and a valve needle shaft of the valve needle. The magnetic restricter can be arranged either on the valve seat support or on the armature. In the arrangement on the armature, the magnetic restricter is preferably located on the periphery of a segment aligned with the valve needle.

#### Brief Description Of The Drawings

Figure 1 depicts a fuel injector according to the related art in a cutaway representation.

Figure 2 depicts a section of a cutaway representation of a fuel injector based on the fundamental kinematic principle underlying the present invention, but not having all of the features of the present invention.

Figure 3 depicts an enlarged representation of section III in Figure 2.

Figure 4 depicts a section of a cutaway representation of a first exemplary embodiments of a fuel injector according to the present invention.

Figure 5 depicts section V in Figure 4.

Figure 6 depicts a section of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector according to the present invention.

Figure 7 depicts a section of a cutaway representation of a detail of a third and fourth

exemplary embodiment of a fuel injector according to the present invention.

### Detailed Description

Before three exemplary embodiments of a fuel injector equipped in accordance with the present invention are described in greater detail on the basis of Figures 4, 5, 6, and 7, an already known fuel injector will first be briefly explained on the basis of Figure 1 with respect to its essential components, for the purpose of improved comprehension, and then, on the basis of Figures 2 and 3, the fundamental kinematic base principle underlying the present invention will be briefly explained.

The fuel injector generally designated as reference numeral 1 has a fuel intake pipe 2, which can be connected via a thread 4 to a fuel line in a generally known manner. Fuel injector 1 is executed in the shape of an injector for fuel injection systems of mixture-compressing, spark-ignition internal combustion engines. Fuel injector 1 is particularly suited for the direct injection of fuel into an undepicted combustion chamber of an internal combustion engine. Via a fuel filter 3, the fuel enters a longitudinal bore hole 6 configured in a core 5. Core 5 has an external thread segment 7, which is screwed to fuel intake pipe 2.

Core 5 at its downstream end 10 is surrounded by solenoid coil 8, which is wound on a coil holder 9. Located downstream of downstream end 10 of core 5 is an armature 11, which is separated from end 10 of core 5 by a slight gap. Armature 11 has bore holes 12 for the passage of the fuel. Armature 11 is also fixedly connected to a valve needle 13, e.g., by welding. At the end opposite armature 11, valve needle 13 has a valve-closure member 14, which cooperates with a valve seat 15 configured on a valve seat support 16. In the example depicted in Figure 1, valve seat support 16 is inserted into a housing body 17 and is sealed by a sealing ring 18.

Housing body 17 can be screwed using a thread 19, e.g., into an undepicted cylinder head of an internal combustion engine. When fuel injector 1 is opened, fuel is injected via at least one spray-discharge opening 20, configured on the downstream end of valve seat support 16, into the also undepicted combustion chamber of the internal combustion engine. Functioning to

improve the distribution of the fuel are, e.g., a plurality of peripherally disposed swirl grooves 21 on valve-closure member 14. Functioning to seal off valve seat support 16 in the bore holes of the cylinder head is a gasket seal 22. Valve needle 13 is guided on guide surfaces 24 in a longitudinal bore hole 23 of valve seat support 16. Between guide surfaces 24 there are flattened-off areas 25, to make possible the unimpeded passage of the fuel.

To open fuel injector 1, solenoid coil 8 is excited by an electrical excitation current, which is supplied via an electrical connecting cable 26. In the resting state of fuel injector 1, armature 11 is acted upon by a first resetting spring 27 contrary to its stroke direction, so that valve-closure member 14 on valve seat 15 is held in the sealing position. When solenoid coil 8 is excited, armature 11 is pulled in the stroke direction toward core 5, the stroke being indicated by the gap existing, in the resting position, between core 5 and armature 11. Valve needle 13, fixedly connected to armature 11, and valve-closure member 14 are carried along in the stroke direction so that valve-closure member 14 releases spray-discharge opening 20.

When the excitation current is switched off, armature 11, valve needle 13, which is fixedly connected to armature 11, and valve-closure member 14 are accelerated by first resetting spring 27 in the closing direction contrary to the stroke direction. If valve-closure member 14 strikes against valve seat 15, the result, due to the elasticity of valve needle 13 and due to the mass of armature 11, which is fixedly connected to valve needle 13, can be a rebound of valve-closure member 14 from valve seat 15. This is highly undesirable because this effect can lead to a renewed short-term opening of fuel injector 1, falsifying both the metering time as well as the metering quantity.

When known fuel injector 1, depicted in Figure 1, is opened, the disadvantage exists that the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, acts on armature 11 and valve needle 13, which is fixedly joined to armature 11. This is unfavorable inasmuch as the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, does not immediately reach its final value due to the self-induction of solenoid coil 8 and due to the eddy currents induced by solenoid coil 8. Therefore, in the initial phase of the opening stroke, a reduced magnetic force is initially exerted on armature 11, which for many application cases leads to an undesirably long

opening time.

The embodiment depicted in Figures 2 and 3 functions so as to overcome these disadvantages. Figure 2 depicts a segment in an enlarged, cutaway representation. In this context, in an enlarged view, only those components are shown which are of major importance for the present invention. The configuration of the remaining components can be identical to a known fuel injector 1, in particular a fuel injector 1 depicted in Figure 1. To facilitate comprehension, the elements in Figure 2 already described on the basis of Figure 1 are identified with corresponding reference numerals. In Figure 3, segment III in Figure 2 is depicted in a representation that is also significantly enlarged with respect to Figure 2.

At the end opposite valve-closure member 14, valve needle 13 has a flange 30, which in the depicted example has the shape of a stepped cylinder 37. Armature 11 is not fixedly joined to valve needle 13, but rather is axially movable within preestablished limits with regard to valve needle 13. Valve needle 13, i.e., in the depicted example, flange 30 of valve needle 13, has a first limit stop 32 for armature 11. First limit stop 32 in the depicted example is provided on a first step 31 of flange 30, which is configured as a stepped cylinder 37. A second limit stop 33 is provided on a housing-mounted, stationary adjusting disk 34, which is configured in the example so as to be annular or partially annular, the adjusting disk being able to be inserted into housing body 17. Adjusting disk 34 can be restrained, e.g., by being jammed into place. In addition, it is possible to secure adjusting disk 34 on housing body 17 by a welded seam 35. For axially positioning adjusting disk 34, housing body 17 can have a stepped projection 36. Adjusting disk 34, in this context, when introduced into housing body 17, is inserted until it contacts projection 36 of housing body 17.

In Figures 2 and 3, the resting position of fuel injector 1 is depicted, there being no electrical excitation of solenoid coil 8. As can be seen from his Figure, the distance between first limit stop 32 on flange 30 of valve needle 13 and second, stationary limit stop 33 is dimensioned so that, in the resting state of fuel injector 1, a gap 39 arises between first limit stop 32 and end face 38 of armature 11, opposite first limit stop 32. Armature 11 in the depicted resting state is held in position at second limit stop 33 of stationary adjusting disk 34 by a second resetting spring 40. Second resetting spring 40 is positioned between a first step 41 of flange

30, which is configured as a stepped cylinder 37, and end face 38 of armature 11, opposite first limit stop 32. On second step 41 of stepped cylinder 37, first resetting spring 27 is also supported at an end face 44, located opposite, the first resetting spring also contacting valve needle 13 via flange 30 and biasing valve needle 13 in the closing direction. As can be seen both from Figure 2 as well as from Figure 3, a second gap 42 exists between downstream end 10 of core 5 and upper end face 38 of armature 11, the second gap being larger dimensioned in the axial direction than first gap 39, which is provided between first limit stop 32 and end face 38 of armature 11.

The mode of functioning of the fuel injector is as follows:

When the fuel injector is opened, after solenoid coil 8 is excited, initially only armature 11 is accelerated in the stroke direction towards second resetting spring 40, at first without carrying with it valve needle 13 and valve-closure member 14, which is connected to valve needle 13. Armature 11, due to the preacceleration, strikes first limit stop 32 so as to have a significant impulse, and carries valve needle 13 and valve-closure member 14 with it. Due to the preacceleration and the impulse of armature 11, a relatively sweeping opening motion is achieved after armature 11 strikes first limit stop 32. In addition, the flight time of armature 11 before striking first limit stop 32 has the advantage that, if the distance between first stop 32 and second limit stop 33 is correctly dimensioned, a delay time is achieved of sufficient length for the magnetic force in the meantime to reach its full intensity. As was already described, in the initial phase of the excitement of solenoid coil 8, the magnetic force generated by solenoid coil 8 is reduced due to the self-induction of solenoid coil 8 and the induced eddy currents. The acceleration of valve needle 13 and of valve-closure member 14 is then achieved at full, not reduced, magnetic force, which also contributes to a short opening time. After reaching first limit stop 32, armature 11, together with valve needle 13 and valve-closure member 14, is accelerated in the stroke direction until end face 38 of armature 11 reaches the downstream end face of end 10 of core 5. First gap 39 therefore determines the preacceleration of armature 11, whereas second gap 42 defines the opening stroke of fuel injector 1.

When fuel injector 1 is closed, armature 11, valve needle 13, and valve-closure member 14

initially move synchronously in the closing direction. As soon as valve-closure member 14 reaches valve seat 15, the motion of valve-closure member 14 and of valve needle 13 is abruptly ended, whereas armature 11 continues to move in the closing direction until armature 11 strikes second limit stop 33. Even if armature 11 rebounds from second limit stop 33, this does not have any negative effect on the opening behavior of fuel injector 1, because second resetting spring 40 prevents armature 11 from once again reaching first limit stop 32. Therefore, valve needle 13 and valve-closure member 14 are prevented from once again being carried along. Finally, armature 11 is held in position at second limit stop 33 by second resetting spring 40, until a new current pulse brings about a new opening of fuel injector 1 by exciting solenoid coil 8.

Therefore, as a result of this measure, both an effective debouncing as well as a relatively short opening time of fuel injector 1 are achieved.

Figure 4 depicts a first exemplary embodiment of a fuel injector according to the present invention, in one segment of a cutaway representation. Here too, elements that have already been described are identified with the corresponding reference numerals.

In contrast to the embodiment described on the basis of Figures 2 and 3, in the exemplary embodiment according to the present dimension, no adjusting disk 34 is provided. Instead, second limit stop 33 is configured directly on intake-side end face 50 of the connecting part that is configured as valve seat support 16. In the exemplary embodiment depicted in Figure 4, valve seat support 16 is made of a magnetic, in particular, ferritic material. In this context, what is avoided is that a significant magnetic flux flows from armature 11 into valve seat support 16 and then further directly into housing body 17, which closes the magnetic circuit as external pole 59, because this brings about a counterforce acting on armature 11 in the direction contrary to opening, thus reducing the magnetic opening force that is effectively exerted upon armature 11. Rather, care is taken that the main magnetic flux flows directly from armature 11 into housing body 17, circumventing valve seat support 16. For this purpose, a magnetic restricter 56 is provided on valve seat support 16 directly in the fuel flow direction underneath end face 50 forming second limit stop 33, the restricter being formed by an annular groove 51. As a result of the constriction of the material of valve seat support 16



in the area of restricter 56, the magnetic flux at this location is weakened, so that the main flux overflows directly from armature 11 into housing body 17, i.e., in the reverse direction. A casing 52 is disposed between housing body 17 and armature 11 and valve seat support 16.

Figure 5 depicts the segment designated in Figure 4 as V and clarifies the circumstances described above. It can be seen that secondary magnetic flux 53, which runs from housing body 17, acting as external magnetic pole 59, via valve seat support 16 to armature 11, is significantly weakened in comparison to main magnetic flux 58, which runs from housing body 17 directly to armature 11.

Figure 6 depicts a segment of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector 1 according to the present invention.

The exemplary embodiment depicted in Figure 6 is distinguished from the exemplary embodiment already described on the basis of Figures 4 and 5 by fact that valve seat support 16 is made of a nonmagnetic material, for example, a ceramic material or a plastic material. Because valve seat support 16 in this exemplary embodiment is made of a nonmagnetic material, no secondary magnetic flux is generated via valve seat support 16, so that restricter 56 can be dispensed with.

Figure 7 depicts a detail of a third and fourth exemplary embodiment of a fuel injector 1 according to the present invention, also in a segment view of a cutaway representation. In this context, in the left half of Figure 7, a third exemplary embodiment is depicted, and in the right half of Figure 7, a fourth exemplary embodiment. In the third exemplary embodiment, depicted in the left half of Figure 7, valve seat support 16 takes over only the function of guiding armature 11 but not the function of the armature limit stop. For this purpose, on valve seat support 16, an armature guide 57 is provided, which cooperates with an armature shaft 60, which extends axially in the spray-discharge direction from an armature main body 61. Armature guide 57 is executed on the basis of reduced material strength, so that in this area a magnetic restricter 56 results. Because armature 11 strikes not against valve seat support 16 but rather against another component not depicted in Figure 7, an axial gap 63 exists between armature guide 57 and end face 43 of armature 11, configured on main armature body 61.

This axial gap 63 creates additional magnetic insulation of armature 11 from valve seat support 16, which in this exemplary embodiment can be made of a magnetic, i.e., ferritic, material.

5 In the fourth exemplary embodiment of a fuel injector 1 according to the present invention, depicted in the right half of Figure 7, armature 11 does indeed strike against intake-side end face 50 of valve seat support 16. However, in this exemplary embodiment, valve seat support 16 does not take on the function of guiding armature 11, but rather only of providing the limit stop. Armature 11 can be guided, for example, in the casing 52. A radial gap 62 is formed  
10 between valve seat support 16 and armature shaft 60, which extends from main armature body 61. Because in this exemplary embodiment there is no magnetic restricter 56, valve seat support 16 is advantageously made of a nonmagnetic material, for example a ceramic material.

## Abstract Of The Disclosure

A fuel injector for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, has a solenoid coil, an armature that can be acted upon by the solenoid coil in a stroke direction in opposition to a first resetting spring, and a valve needle connected to a valve-closure member. The valve needle has a first limit stop for the movable armature, the armature additionally being acted upon by a second resetting spring. In addition, a stationary second limit stop is provided for the armature. The second resetting spring acts upon the armature contrary to the stroke direction and, in the resting position, when the solenoid coil is not excited, the second resetting spring holds the armature in position at the second limit stop such that the armature is at a preestablished distance from the first limit stop, which is configured on the valve needle. A connecting part can be made of a magnetic material and can be configured as having a magnetic restricter, or it can be made of a nonmagnetic material.

## FUEL INJECTOR

Field Of The Invention

The present invention [is based on] relates to a fuel injector.[according to the species of Claims 1 and 2]

5

Background Information

[From German Laid-Open Print] German Published Patent Application No. 33 14 899 describes [,] an electromagnetically actuatable fuel injector [is known], in which an armature cooperates with an electrically excitable solenoid coil for the purpose of electromagnetic actuation, and the stroke of the armature is transmitted via a valve needle to a valve-closure member. The valve-closure member cooperates with a valve seat. The armature is not fixedly mounted on the valve needle but rather the armature is arranged so as to be axially movable with respect to the valve needle. A first resetting spring acts upon the valve needle in the closing direction and therefore keeps the fuel injector closed in the currentless, non-excited state of the solenoid coil. The armature, via a second resetting spring, is acted upon in the stroke direction such that the armature, in the resting position, contacts a first limit stop that is provided on the valve needle. When the solenoid coil is excited, the armature is pulled in the stroke direction and, as a result of the first limit stop, takes the valve needle with it. When the current exciting the solenoid coil is switched off, the valve needle is accelerated into its closed position by the first resetting spring, taking the armature with it as a result of the above-mentioned limit stop. As soon as the valve-closure member strikes against the valve seat, the closing motion of the valve needle is abruptly ended. The armature, which is not fixedly joined to the valve needle, continues to move in the stroke direction and the motion is absorbed by the second resetting spring, i.e., the armature swings through against a second resetting spring, which has a significantly lower spring constant than the first resetting spring. Finally, the second resetting spring accelerates the armature once again in the stroke direction. If the armature strikes against the limit stop of the valve needle, the can result in the valve-closure member, which is connected to the valve needle, once again briefly lifting off

09/856906  
10  
15  
20  
25

20

25

from the valve seat, therefore generating a short-term opening of the fuel injector. The debouncing in the fuel injector known from German [Laid-Open Print] Published Patent Application No. 33 14 899 is therefore imperfect. In addition, it is disadvantageous both in a conventional fuel injector, in which the armature is fixedly connected to the valve needle, as well as in the fuel injector known from German [Laid-Open Print] Published Patent Application No. 33 14 899, that the opening stroke of the valve needle begins immediately as soon as the magnetic force exerted by the solenoid coil on the armature exceeds the sum of the forces acting in the closing direction, i.e., the spring closing force exerted by the first resetting spring and the hydraulic forces of the fuel, which is under pressure. This is disadvantageous to the extent that, when the current exciting the solenoid coil is switched on, the magnetic force has not yet reached its final value due to the self-induction of the solenoid coil and the eddy currents that arise. At the beginning of the opening stroke, the valve needle and the valve-closure member are therefore accelerated at a reduced force. This leads to an opening time that is not satisfactory for all application cases.

In U.S. Patent No. 5,299,776, it is proposed, in this regard, not to connect the armature fixedly to the valve needle but rather to allow the armature a certain axial freedom of motion on the valve needle. However, in this embodiment, the axial position of the armature, in the resting position of the fuel injector, is not defined, and therefore, in the fuel injector known from this publication, the response time is uncertain when the exciting current is switched on.

#### [Advantages of the] Summary Of The Invention

In contrast, the fuel injector according to the present invention [having the characterizing features of Claim 1 or 2] has the advantage that the fuel injector is debounced in a satisfactory manner and, additionally, that it has an extremely small opening time. Because of the immediate limit stop on the connecting part, an adjusting or guide disk can be dispensed with. The enlarged guide diameter generates improved guide properties, i.e., the valve needle is less sensitive to tilting or jamming. As a result of the fact that the guide is closer on the armature, the moments are reduced.

As a result of the fact that the second resetting spring holds the armature in the resting

position of the fuel injector not at the first limit stop provided on the valve needle but at a stationary second limit stop at a distance from the first limit stop of the valve needle, it is achieved, when the fuel injector is closed, that the armature is not accelerated once again in the stroke direction by the second resetting spring. When the fuel injector is closed, the motion of the valve needle is abruptly ended if the valve-closure member comes into contact with the valve seat, as a result of the acceleration by the first resetting spring. In the fuel injector according to the present invention, the motion of the armature also continues in the closing direction, i.e., contrary to the stroke direction, until the armature has reached the second limit stop. If the armature rebounds from the second limit stop, it is nevertheless once again accelerated by the second resetting spring, contrary to the stroke direction, and the armature is prevented once again from reaching the first limit stop on the valve needle and therefore from carrying the valve needle with it in the opening direction. As a result of the second resetting spring, the armature is held at a distance from the first limit stop provided on the valve needle until the armature is once again accelerated in the stroke direction by the solenoid coil as a consequence of the next current pulse exciting the solenoid coil.

A further advantage of the fuel injector lies in the fact that the armature initially experiences a preacceleration before reaching the first limit stop provided on the valve needle, i.e., before carrying the valve needle with it. In this manner, the armature received an impulse, which it transmits to the valve needle, even before carrying the valve needle with it. In comparison to a fuel injector in which the armature is fixedly connected to the valve needle or a fuel injector in which the armature is movable with respect to the valve needle but in the resting position contacts the limit stop of the valve needle, a substantially shorter opening time and therefore a more precise metering of the fuel is achieved. A further effect that shortens the opening time arises from the fact that the magnetic force exerted on the armature is initially reduced when the current pulse exciting the solenoid coil is switched on, due to the self-induction of the solenoid coil and the eddy currents excited by the solenoid coil. If the distance is appropriately dimensioned between the second limit stop, at which the armature is positioned in its resting position, and the first limit stop, which acts to carry the valve needle with it, it can therefore be achieved that, when the armature strikes the first limit stop of the valve needle, so much time has already passed that the magnetic force has reached its final constant value. Therefore, as a result of the added flight time of the armature, a time delay is achieved

which significantly shortens the subsequent opening time of the fuel injector.

[As a result of the measures indicated in the subclaims, advantageous refinements and improvements of the fuel injector indicated in Claims 1 and 2 are possible.]

5

In the connecting part executed as the valve seat support, it is possible to integrate both an armature guide as well as a second limit stop. In this context, however, in a first peripheral area, the valve seat support having the armature guide can be configured not having the second limit stop, and in a second peripheral area, it can be configured as having the second limit stop but not having the anchor guide. As a result of the functional separation of limit stop and anchor guide, the requirements with respect to manufacturing precision are less stringent.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202

Figure 4 depicts a section of a cutaway representation of a first exemplary embodiment of a fuel injector according to the present invention[;].

Figure 5 depicts section V in Figure 4[;].

Figure 6 depicts a section of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector according to the present invention.

Figure 7 depicts a section of a cutaway representation of a detail of a third and fourth exemplary embodiment of a fuel injector according to the present invention.

#### Detailed Description [of the Exemplary Embodiments]

Before three exemplary embodiments of a fuel injector equipped in accordance with the present invention are described in greater detail on the basis of Figures 4, 5, 6, and 7, an already known fuel injector will first be briefly explained on the basis of Figure 1 with respect to its essential components, for the purpose of improved comprehension, and then, on the basis of Figures 2 and 3, the fundamental kinematic base principle underlying the present invention will be briefly explained.

The fuel injector generally designated as reference numeral 1 has a fuel intake pipe 2, which can be connected via a thread 4 to a fuel line in a generally known manner. Fuel injector 1 is executed in the shape of an injector for fuel injection systems of mixture-compressing, spark-ignition internal combustion engines. Fuel injector 1 is particularly suited for the direct injection of fuel into an undepicted combustion chamber of an internal combustion engine. Via a fuel filter 3, the fuel enters a longitudinal bore hole 6 configured in a core 5. Core 5 has an external thread segment 7, which is screwed to fuel intake pipe 2.

Core 5 at its downstream end 10 is surrounded by solenoid coil 8, which is wound on a coil holder 9. Located downstream of downstream end 10 of core 5 is an armature 11, which is separated from end 10 of core 5 by a slight gap. Armature 11 has bore holes 12 for the passage of the fuel. Armature 11 is also fixedly connected to a valve needle 13, e.g., by



welding. At the end opposite armature 11, valve needle 13 has a valve-closure member 14, which cooperates with a valve seat 15 configured on a valve seat support 16. In the example depicted in Figure 1, valve seat support 16 is inserted into a housing body 17 and is sealed by a sealing ring 18.

Housing body 17 can be screwed using a thread 19, e.g., into an undepicted cylinder head of an internal combustion engine. When fuel injector 1 is opened, fuel is injected via at least one spray-discharge opening 20, configured on the downstream end of valve seat support 16, into the also undepicted combustion chamber of the internal combustion engine. Functioning to improve the distribution of the fuel are, e.g., a plurality of peripherally disposed swirl grooves 21 on valve-closure member 14. Functioning to seal off valve seat support 16 in the bore holes of the cylinder head is a gasket seal 22. Valve needle 13 is guided on guide surfaces 24 in a longitudinal bore hole 23 of valve seat support 16. Between guide surfaces 24 there are flattened-off areas 25, to make possible the unimpeded passage of the fuel.

To open fuel injector 1, solenoid coil 8 is excited by an electrical excitation current, which is supplied via an electrical connecting cable 26. In the resting state of fuel injector 1, armature 11 is acted upon by a first resetting spring 27 contrary to its stroke direction, so that valve-closure member 14 on valve seat 15 is held in the sealing position. When solenoid coil 8 is excited, armature 11 is pulled in the stroke direction toward core 5, the stroke being indicated by the gap existing, in the resting position, between core 5 and armature 11. Valve needle 13, fixedly connected to armature 11, and valve-closure member 14 are carried along in the stroke direction so that valve-closure member 14 releases spray-discharge opening 20.

When the excitation current is switched off, armature 11, valve needle 13, which is fixedly connected to armature 11, and valve-closure member 14 are accelerated by first resetting spring 27 in the closing direction contrary to the stroke direction. If valve-closure member 14 strikes against valve seat 15, the result, due to the elasticity of valve needle 13 and due to the mass of armature 11, which is fixedly connected to valve needle 13, can be a rebound of valve-closure member 14 from valve seat 15. This is highly undesirable because this effect can lead to a renewed short-term opening of fuel injector 1, falsifying both the metering time as well as the metering quantity.

When known fuel injector 1, depicted in Figure 1, is opened, the disadvantage exists that the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, acts on armature 11 and valve needle 13, which is fixedly joined to armature 11. This is unfavorable inasmuch as the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, does not immediately reach its final value due to the self-induction of solenoid coil 8 and due to the eddy currents induced by solenoid coil 8. Therefore, in the initial phase of the opening stroke, a reduced magnetic force is initially exerted on armature 11, which for many application cases leads to an undesirably long opening time.

The embodiment depicted in Figures 2 and 3 functions so as to overcome these disadvantages. Figure 2 depicts a segment in an enlarged, cutaway representation. In this context, in an enlarged view, only those components are shown which are of major importance for the present invention. The configuration of the remaining components can be identical to a known fuel injector 1, in particular a fuel injector 1 depicted in Figure 1. To facilitate comprehension, the elements in Figure 2 already described on the basis of Figure 1 are identified with corresponding reference numerals. In Figure 3, segment III in Figure 2 is depicted in a representation that is also significantly enlarged with respect to Figure 2.

At the end opposite valve-closure member 14, valve needle 13 has a flange 30, which in the depicted example has the shape of a stepped cylinder 37. Armature 11 is not fixedly joined to valve needle 13, but rather is axially movable within preestablished limits with regard to valve needle 13. Valve needle 13, i.e., in the depicted example, flange 30 of valve needle 13, has a first limit stop 32 for armature 11. First limit stop 32 in the depicted example is provided on a first step 31 of flange 30, which is configured as a stepped cylinder 37. A second limit stop 33 is provided on a housing-mounted, stationary adjusting disk 34, which is configured in the example so as to be annular or partially annular, the adjusting disk being able to be inserted into housing body 17. Adjusting disk 34 can be restrained, e.g., by being jammed into place. In addition, it is possible to secure adjusting disk 34 on housing body 17 by a welded seam 35. For axially positioning adjusting disk 34, housing body 17 can have a stepped projection 36. Adjusting disk 34, in this context, when introduced into housing body 17, is inserted until it contacts projection 36 of housing body 17.

09856906-10350-1  
15  
10  
5  
In Figures 2 and 3, the resting position of fuel injector 1 is depicted, there being no electrical excitation of solenoid coil 8. As can be seen from his Figure, the distance between first limit stop 32 on flange 30 of valve needle 13 and second, stationary limit stop 33 is dimensioned so that, in the resting state of fuel injector 1, a gap 39 arises between first limit stop 32 and end face 38 of armature 11, opposite first limit stop 32. Armature 11 in the depicted resting state is held in position at second limit stop 33 of stationary adjusting disk 34 by a second resetting spring 40. Second resetting spring 40 is positioned between a first step 41 of flange 30, which is configured as a stepped cylinder 37, and end face 38 of armature 11, opposite first limit stop 32. On second step 41 of stepped cylinder 37, first resetting spring 27 is also supported at an end face 44, located opposite, the first resetting spring also contacting valve needle 13 via flange 30 and biasing valve needle 13 in the closing direction. As can be seen both from Figure 2 as well as from Figure 3, a second gap 42 exists between downstream end 10 of core 5 and upper end face 38 of armature 11, the second gap being larger dimensioned in the axial direction than first gap 39, which is provided between first limit stop 32 and end face 38 of armature 11.

The mode of functioning of the fuel injector is as follows:

20  
25  
30  
When the fuel injector is opened, after solenoid coil 8 is excited, initially only armature 11 is accelerated in the stroke direction towards second resetting spring 40, at first without carrying with it valve needle 13 and valve-closure member 14, which is connected to valve needle 13. Armature 11, due to the preacceleration, strikes first limit stop 32 so as to have a significant impulse, and carries valve needle 13 and valve-closure member 14 with it. Due to the preacceleration and the impulse of armature 11, a relatively sweeping opening motion is achieved after armature 11 strikes first limit stop 32. In addition, the flight time of armature 11 before striking first limit stop 32 has the advantage that, if the distance between first stop 32 and second limit stop 33 is correctly dimensioned, a delay time is achieved of sufficient length for the magnetic force in the meantime to reach its full intensity. As was already described, in the initial phase of the excitement of solenoid coil 8, the magnetic force generated by solenoid coil 8 is reduced due to the self-induction of solenoid coil 8 and the induced eddy currents. The acceleration of valve needle 13 and of valve-closure member 14 is then achieved at full, not reduced, magnetic force, which also contributes to a short opening

time. After reaching first limit stop 32, armature 11, together with valve needle 13 and valve-closure member 14, is accelerated in the stroke direction until end face 38 of armature 11 reaches the downstream end face of end 10 of core 5. First gap 39 therefore determines the preacceleration of armature 11, whereas second gap 42 defines the opening stroke of fuel injector 1.

When fuel injector 1 is closed, armature 11, valve needle 13, and valve-closure member 14 initially move synchronously in the closing direction. As soon as valve-closure member 14 reaches valve seat 15, the motion of valve-closure member 14 and of valve needle 13 is abruptly ended, whereas armature 11 continues to move in the closing direction until armature 11 strikes second limit stop 33. Even if armature 11 rebounds from second limit stop 33, this does not have any negative effect on the opening behavior of fuel injector 1, because second resetting spring 40 prevents armature 11 from once again reaching first limit stop 32. Therefore, valve needle 13 and valve-closure member 14 are prevented from once again being carried along. Finally, armature 11 is held in position at second limit stop 33 by second resetting spring 40, until a new current pulse brings about a new opening of fuel injector 1 by exciting solenoid coil 8.

Therefore, as a result of this measure, both an effective debouncing as well as a relatively short opening time of fuel injector 1 are achieved.

Figure 4 depicts a first exemplary embodiment of a fuel injector according to the present invention, in one segment of a cutaway representation. Here too, elements that have already been described are identified with the corresponding reference numerals.

In contrast to the embodiment described on the basis of Figures 2 and 3, in the exemplary embodiment according to the present dimension, no adjusting disk 34 is provided. Instead, second limit stop 33 is configured directly on intake-side end face 50 of the connecting part that is configured as valve seat support 16. In the exemplary embodiment depicted in Figure 4, valve seat support 16 is made of a magnetic, in particular, ferritic material. In this context, [it must be] what is avoided is that a significant magnetic flux flows from armature 11 into valve seat support 16 and then further directly into housing body 17, which closes the

0955906-102504  
1052073065850

magnetic circuit as external pole 59, because this brings about a counterforce acting on armature 11 in the direction contrary to opening, thus reducing the magnetic opening force that is effectively exerted upon armature 11. Rather, care [must be] is taken that the main magnetic flux flows directly from armature 11 into housing body 17, circumventing valve seat support 16. For this purpose, a magnetic restricter 56 is provided on valve seat support 16 directly in the fuel flow direction underneath end face 50 forming second limit stop 33, the restricter being formed by an annular groove 51. As a result of the constriction of the material of valve seat support 16 in the area of restricter 56, the magnetic flux at this location is weakened, so that the main flux overflows directly from armature 11 into housing body 17, i.e., in the reverse direction. A casing 52 is disposed between housing body 17 and armature 11 and valve seat support 16.

Figure 5 depicts the segment designated in Figure 4 as V and clarifies the circumstances described above. It can be seen that secondary magnetic flux 53, which runs from housing body 17, acting as external magnetic pole 59, via valve seat support 16 to armature 11, is significantly weakened in comparison to main magnetic flux 58, which runs from housing body 17 directly to armature 11.

Figure 6 depicts a segment of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector 1 according to the present invention.

The exemplary embodiment depicted in Figure 6 is distinguished from the exemplary embodiment already described on the basis of Figures 4 and 5 by fact that valve seat support 16 is made of a nonmagnetic material, for example, a ceramic material or a plastic material. Because valve seat support 16 in this exemplary embodiment is made of a nonmagnetic material, no secondary magnetic flux is generated via valve seat support 16, so that restricter 56 can be dispensed with.

Figure 7 depicts a detail of a third and fourth exemplary embodiment of a fuel injector 1 according to the present invention, also in a segment view of a cutaway representation. In this context, in the left half of Figure 7, a third exemplary embodiment is depicted, and in the right half of Figure 7, a fourth exemplary embodiment. In the third exemplary embodiment,

depicted in the left half of Figure 7, valve seat support 16 takes over only the function of guiding armature 11 but not the function of the armature limit stop. For this purpose, on valve seat support 16, an armature guide 57 is provided, which cooperates with an armature shaft 60, which extends axially in the spray-discharge direction from an armature main body 61.

Armature guide 57 is executed on the basis of reduced material strength, so that in this area a magnetic restricter 56 results. Because armature 11 strikes not against valve seat support 16 but rather against another component not depicted in Figure 7, an axial gap 63 exists between armature guide 57 and end face 43 of armature 11, configured on main armature body 61.

This axial gap 63 creates additional magnetic insulation of armature 11 from valve seat support 16, which in this exemplary embodiment can be made of a magnetic, i.e., ferritic, material.

In the fourth exemplary embodiment of a fuel injector 1 according to the present invention, depicted in the right half of Figure 7, armature 11 does indeed strike against intake-side end face 50 of valve seat support 16. However, in this exemplary embodiment, valve seat support 16 does not take on the function of guiding armature 11, but rather only of providing the limit stop. Armature 11 can be guided, for example, in the casing 52. A radial gap 62 is formed between valve seat support 16 and armature shaft 60, which extends from main armature body 61. Because in this exemplary embodiment there is no magnetic restricter 56, valve seat support 16 is advantageously made of a nonmagnetic material, for example a ceramic material.

## Abstract Of The Disclosure

A fuel injector [(1)] for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, has a solenoid coil[(8)], an armature [(11)] that can be acted upon by the solenoid coil [(8)] in a stroke direction in opposition to a first resetting spring[(27)], and a valve needle [(13)] connected to a valve-closure member[(14)]. The valve needle [(13)] has a first limit stop [(32)] for the movable armature[(11)], the armature [(11)] additionally being acted upon by a second resetting spring[(40)]. In addition, a stationary second limit stop [(33)] is provided for the armature[(11)]. The second resetting spring [(40)] acts upon the armature [(11)] contrary to the stroke direction and, in the resting position, when the solenoid coil [(8)] is not excited, the second resetting spring holds the armature [(11)] in position at the second limit stop [(33)] such that the armature [(11)] is at a preestablished distance from the first limit stop[(32)], which is configured on the valve needle[(13)]. A connecting part [(16)] can be made of a magnetic material and can be configured as having a magnetic restricter[(56)], or it can be made of a nonmagnetic material.

[(Figure 4)]

5/PR7S

09/856906

JC18 Rec'd PGT/PTO 2 9 MAY 2001

[10191/1883]

## FUEL INJECTOR

### Background Information

The present invention is based on a fuel injector according to the species of Claims 1 and 2.

5 From German Laid-Open Print 33 14 899, an electromagnetically actuatable fuel injector is known, in which an armature cooperates with an electrically excitable solenoid coil for the purpose of electromagnetic actuation, and the stroke of the armature is transmitted via a valve needle to a valve-closure member. The valve-closure member cooperates with a valve seat. The armature is not fixedly mounted on the valve needle but rather the armature is arranged so as to be axially movable with respect to the valve needle. A first resetting spring acts upon the valve needle in the closing direction and therefore keeps the fuel injector closed in the currentless, non-excited state of the solenoid coil. The armature, via a second resetting spring, is acted upon in the stroke direction such that the armature, in the resting position, contacts a first limit stop that is provided on the valve needle. When the solenoid coil is excited, the armature is pulled in the stroke direction and, as a result of the first limit stop, takes the valve needle with it. When the current exciting the solenoid coil is switched off, the valve needle is accelerated into its closed position by the first resetting spring, taking the armature with it as a result of the above-mentioned limit stop. As soon as the valve-closure member strikes against the valve seat, the closing motion of the valve needle is abruptly ended. The armature, which is not fixedly joined to the valve needle, continues to move in the stroke direction and the motion is absorbed by the second resetting spring, i.e., the armature swings through against a second resetting spring, which has a significantly lower spring constant than the first resetting spring. Finally, the second resetting spring accelerates the armature once again in the stroke direction. If the armature strikes against the limit stop of the valve needle, the can result in the valve-closure member, which is connected to the valve needle, once again briefly lifting off from the valve seat, therefore generating a short-term opening of the fuel injector. The debouncing in the fuel injector known from German Laid-Open Print 33 14 899 is therefore imperfect. In addition, it is disadvantageous both in a conventional fuel injector, in which the armature is fixedly connected to the valve needle, as well as in the fuel injector known from German Laid-Open Print 33 14 899, that the opening stroke of the valve needle



09856906-102301  
15  
begins immediately as soon as the magnetic force exerted by the solenoid coil on the armature exceeds the sum of the forces acting in the closing direction, i.e., the spring closing force exerted by the first resetting spring and the hydraulic forces of the fuel, which is under pressure. This is disadvantageous to the extent that, when the current exciting the solenoid coil is switched on, the magnetic force has not yet reached its final value due to the self-induction of the solenoid coil and the eddy currents that arise. At the beginning of the opening stroke, the valve needle and the valve-closure member are therefore accelerated at a reduced force. This leads to an opening time that is not satisfactory for all application cases.

10 In U.S. Patent 5,299,776, it is proposed, in this regard, not to connect the armature fixedly to the valve needle but rather to allow the armature a certain axial freedom of motion on the valve needle. However, in this embodiment, the axial position of the armature, in the resting position of the fuel injector, is not defined, and therefore, in the fuel injector known from this publication, the response time is uncertain when the exciting current is switched on.

#### Advantages of the Invention

15 In contrast, the fuel injector according to the present invention having the characterizing features of Claim 1 or 2 has the advantage that the fuel injector is debounced in a satisfactory manner and, additionally, that it has an extremely small opening time. Because of the immediate limit stop on the connecting part, an adjusting or guide disk can be dispensed with. The enlarged guide diameter generates improved guide properties, i.e., the valve needle is less sensitive to tilting or jamming. As a result of the fact that the guide is closer on the armature, the moments are reduced.

20 As a result of the fact that the second resetting spring holds the armature in the resting position of the fuel injector not at the first limit stop provided on the valve needle but at a stationary second limit stop at a distance from the first limit stop of the valve needle, it is achieved, when the fuel injector is closed, that the armature is not accelerated once again in the stroke direction by the second resetting spring. When the fuel injector is closed, the motion of the valve needle is abruptly ended if the valve-closure member comes into contact with the valve seat, as a result of the acceleration by the first resetting spring. In the fuel injector according to the present invention, the motion of the armature also continues in the

closing direction, i.e., contrary to the stroke direction, until the armature has reached the second limit stop. If the armature rebounds from the second limit stop, it is nevertheless once again accelerated by the second resetting spring, contrary to the stroke direction, and the armature is prevented once again from reaching the first limit stop on the valve needle and therefore from carrying the valve needle with it in the opening direction. As a result of the second resetting spring, the armature is held at a distance from the first limit stop provided on the valve needle until the armature is once again accelerated in the stroke direction by the solenoid coil as a consequence of the next current pulse exciting the solenoid coil.

A further advantage of the fuel injector lies in the fact that the armature initially experiences a preacceleration before reaching the first limit stop provided on the valve needle, i.e., before carrying the valve needle with it. In this manner, the armature received an impulse, which it transmits to the valve needle, even before carrying the valve needle with it. In comparison to a fuel injector in which the armature is fixedly connected to the valve needle or a fuel injector in which the armature is movable with respect to the valve needle but in the resting position contacts the limit stop of the valve needle, a substantially shorter opening time and therefore a more precise metering of the fuel is achieved. A further effect that shortens the opening time arises from the fact that the magnetic force exerted on the armature is initially reduced when the current pulse exciting the solenoid coil is switched on, due to the self-induction of the solenoid coil and the eddy currents excited by the solenoid coil. If the distance is appropriately dimensioned between the second limit stop, at which the armature is positioned in its resting position, and the first limit stop, which acts to carry the valve needle with it, it can therefore be achieved that, when the armature strikes the first limit stop of the valve needle, so much time has already passed that the magnetic force has reached its final constant value. Therefore, as a result of the added flight time of the armature, a time delay is achieved which significantly shortens the subsequent opening time of the fuel injector.

As a result of the measures indicated in the subclaims, advantageous refinements and improvements of the fuel injector indicated in Claims 1 and 2 are possible.

In the connecting part executed as the valve seat support, it is possible to integrate both an armature guide as well as a second limit stop. In this context, however, in a first peripheral area, the valve seat support having the armature guide can be configured not having the

second limit stop, and in a second peripheral area, it can be configured as having the second limit stop but not having the anchor guide. As a result of the functional separation of limit stop and anchor guide, the requirements with respect to manufacturing precision are less stringent.

To prevent a magnetic short-circuit, the magnetic restricter is preferably arranged in the area between the second limit stop and a valve needle shaft of the valve needle. The magnetic restricter can be arranged either on the valve seat support or on the armature. In the arrangement on the armature, the magnetic restricter is preferably located on the periphery of a segment aligned with the valve needle.

#### Drawing

Exemplary embodiments of the present invention are depicted in simplified form in the drawing and are discussed in greater detail in the following description. The following are the contents:

Figure 1 depicts a fuel injector according to the related art in a cutaway representation;

Figure 2 depicts a section of a cutaway representation of a fuel injector based on the fundamental kinematic principle underlying the present invention, but not having all of the features of the present invention;

Figure 3 depicts an enlarged representation of section III in Figure 2;

Figure 4 depicts a section of a cutaway representation of a first exemplary embodiments of a fuel injector according to the present invention;

Figure 5 depicts section V in Figure 4;

Figure 6 depicts a section of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector according to the present invention.

Figure 7 depicts a section of a cutaway representation of a detail of a third and fourth exemplary embodiment of a fuel injector according to the present invention.

#### Description of the Exemplary Embodiments

Before three exemplary embodiments of a fuel injector equipped in accordance with the present invention are described in greater detail on the basis of Figures 4, 5, 6, and 7, an already known fuel injector will first be briefly explained on the basis of Figure 1 with respect to its essential components, for the purpose of improved comprehension, and then, on the basis of Figures 2 and 3, the fundamental kinematic base principle underlying the present invention will be briefly explained.

The fuel injector generally designated as reference numeral 1 has a fuel intake pipe 2, which can be connected via a thread 4 to a fuel line in a generally known manner. Fuel injector 1 is executed in the shape of an injector for fuel injection systems of mixture-compressing, spark-ignition internal combustion engines. Fuel injector 1 is particularly suited for the direct injection of fuel into an undepicted combustion chamber of an internal combustion engine. Via a fuel filter 3, the fuel enters a longitudinal bore hole 6 configured in a core 5. Core 5 has an external thread segment 7, which is screwed to fuel intake pipe 2.

Core 5 at its downstream end 10 is surrounded by solenoid coil 8, which is wound on a coil holder 9. Located downstream of downstream end 10 of core 5 is an armature 11, which is separated from end 10 of core 5 by a slight gap. Armature 11 has bore holes 12 for the passage of the fuel. Armature 11 is also fixedly connected to a valve needle 13, e.g., by welding. At the end opposite armature 11, valve needle 13 has a valve-closure member 14, which cooperates with a valve seat 15 configured on a valve seat support 16. In the example depicted in Figure 1, valve seat support 16 is inserted into a housing body 17 and is sealed by a sealing ring 18.

Housing body 17 can be screwed using a thread 19, e.g., into an undepicted cylinder head of an internal combustion engine. When fuel injector 1 is opened, fuel is injected via at least one spray-discharge opening 20, configured on the downstream end of valve seat support 16, into the also undepicted combustion chamber of the internal combustion engine. Functioning to

improve the distribution of the fuel are, e.g., a plurality of peripherally disposed swirl grooves 21 on valve-closure member 14. Functioning to seal off valve seat support 16 in the bore holes of the cylinder head is a gasket seal 22. Valve needle 13 is guided on guide surfaces 24 in a longitudinal bore hole 23 of valve seat support 16. Between guide surfaces 24 there are flattened-off areas 25, to make possible the unimpeded passage of the fuel.

To open fuel injector 1, solenoid coil 8 is excited by an electrical excitation current, which is supplied via an electrical connecting cable 26. In the resting state of fuel injector 1, armature 11 is acted upon by a first resetting spring 27 contrary to its stroke direction, so that valve-closure member 14 on valve seat 15 is held in the sealing position. When solenoid coil 8 is excited, armature 11 is pulled in the stroke direction toward core 5, the stroke being indicated by the gap existing, in the resting position, between core 5 and armature 11. Valve needle 13, fixedly connected to armature 11, and valve-closure member 14 are carried along in the stroke direction so that valve-closure member 14 releases spray-discharge opening 20.

When the excitation current is switched off, armature 11, valve needle 13, which is fixedly connected to armature 11, and valve-closure member 14 are accelerated by first resetting spring 27 in the closing direction contrary to the stroke direction. If valve-closure member 14 strikes against valve seat 15, the result, due to the elasticity of valve needle 13 and due to the mass of armature 11, which is fixedly connected to valve needle 13, can be a rebound of valve-closure member 14 from valve seat 15. This is highly undesirable because this effect can lead to a renewed short-term opening of fuel injector 1, falsifying both the metering time as well as the metering quantity.

When known fuel injector 1, depicted in Figure 1, is opened, the disadvantage exists that the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, acts on armature 11 and valve needle 13, which is fixedly joined to armature 11. This is unfavorable inasmuch as the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, does not immediately reach its final value due to the self-induction of solenoid coil 8 and due to the eddy currents induced by solenoid coil 8.

Therefore, in the initial phase of the opening stroke, a reduced magnetic force is initially exerted on armature 11, which for many application cases leads to an undesirably long opening time.

The embodiment depicted in Figures 2 and 3 functions so as to overcome these disadvantages. Figure 2 depicts a segment in an enlarged, cutaway representation. In this context, in an enlarged view, only those components are shown which are of major importance for the present invention. The configuration of the remaining components can be identical to a known fuel injector 1, in particular a fuel injector 1 depicted in Figure 1. To facilitate comprehension, the elements in Figure 2 already described on the basis of Figure 1 are identified with corresponding reference numerals. In Figure 3, segment III in Figure 2 is depicted in a representation that is also significantly enlarged with respect to Figure 2.

At the end opposite valve-closure member 14, valve needle 13 has a flange 30, which in the depicted example has the shape of a stepped cylinder 37. Armature 11 is not fixedly joined to valve needle 13, but rather is axially movable within preestablished limits with regard to valve needle 13. Valve needle 13, i.e., in the depicted example, flange 30 of valve needle 13, has a first limit stop 32 for armature 11. First limit stop 32 in the depicted example is provided on a first step 31 of flange 30, which is configured as a stepped cylinder 37. A second limit stop 33 is provided on a housing-mounted, stationary adjusting disk 34, which is configured in the example so as to be annular or partially annular, the adjusting disk being able to be inserted into housing body 17. Adjusting disk 34 can be restrained, e.g., by being jammed into place. In addition, it is possible to secure adjusting disk 34 on housing body 17 by a welded seam 35. For axially positioning adjusting disk 34, housing body 17 can have a stepped projection 36. Adjusting disk 34, in this context, when introduced into housing body 17, is inserted until it contacts projection 36 of housing body 17.

In Figures 2 and 3, the resting position of fuel injector 1 is depicted, there being no electrical excitation of solenoid coil 8. As can be seen from this Figure, the distance between first limit stop 32 on flange 30 of valve needle 13 and second, stationary limit stop 33 is dimensioned so that, in the resting state of fuel injector 1, a gap 39 arises between first limit stop 32 and end face 38 of armature 11, opposite first limit stop 32. Armature 11 in the depicted resting state is held in position at second limit stop 33 of stationary adjusting disk 34 by a second resetting spring 40. Second resetting spring 40 is positioned between a first step 41 of flange 30, which is configured as a stepped cylinder 37, and end face 38 of armature 11, opposite first limit stop 32. On second step 41 of stepped cylinder 37, first resetting spring 27 is also supported at an end face 44, located opposite, the first resetting spring also contacting valve

needle 13 via flange 30 and biasing valve needle 13 in the closing direction. As can be seen both from Figure 2 as well as from Figure 3, a second gap 42 exists between downstream end 10 of core 5 and upper end face 38 of armature 11, the second gap being larger dimensioned in the axial direction than first gap 39, which is provided between first limit stop 32 and end face 38 of armature 11.

The mode of functioning of the fuel injector is as follows:

When the fuel injector is opened, after solenoid coil 8 is excited, initially only armature 11 is accelerated in the stroke direction towards second resetting spring 40, at first without carrying with it valve needle 13 and valve-closure member 14, which is connected to valve needle 13. Armature 11, due to the preacceleration, strikes first limit stop 32 so as to have a significant impulse, and carries valve needle 13 and valve-closure member 14 with it. Due to the preacceleration and the impulse of armature 11, a relatively sweeping opening motion is achieved after armature 11 strikes first limit stop 32. In addition, the flight time of armature 11 before striking first limit stop 32 has the advantage that, if the distance between first stop 32 and second limit stop 33 is correctly dimensioned, a delay time is achieved of sufficient length for the magnetic force in the meantime to reach its full intensity. As was already described, in the initial phase of the excitement of solenoid coil 8, the magnetic force generated by solenoid coil 8 is reduced due to the self-induction of solenoid coil 8 and the induced eddy currents. The acceleration of valve needle 13 and of valve-closure member 14 is then achieved at full, not reduced, magnetic force, which also contributes to a short opening time. After reaching first limit stop 32, armature 11, together with valve needle 13 and valve-closure member 14, is accelerated in the stroke direction until end face 38 of armature 11 reaches the downstream end face of end 10 of core 5. First gap 39 therefore determines the preacceleration of armature 11, whereas second gap 42 defines the opening stroke of fuel injector 1.

When fuel injector 1 is closed, armature 11, valve needle 13, and valve-closure member 14 initially move synchronously in the closing direction. As soon as valve-closure member 14 reaches valve seat 15, the motion of valve-closure member 14 and of valve needle 13 is abruptly ended, whereas armature 11 continues to move in the closing direction until armature 11 strikes second limit stop 33. Even if armature 11 rebounds from second limit stop

33, this does not have any negative effect on the opening behavior of fuel injector 1, because second resetting spring 40 prevents armature 11 from once again reaching first limit stop 32. Therefore, valve needle 13 and valve-closure member 14 are prevented from once again being carried along. Finally, armature 11 is held in position at second limit stop 33 by second  
5 resetting spring 40, until a new current pulse brings about a new opening of fuel injector 1 by exciting solenoid coil 8.

Therefore, as a result of this measure, both an effective debouncing as well as a relatively short opening time of fuel injector 1 are achieved.

10 Figure 4 depicts a first exemplary embodiment of a fuel injector according to the present invention, in one segment of a cutaway representation. Here too, elements that have already been described are identified with the corresponding reference numerals.

15 In contrast to the embodiment described on the basis of Figures 2 and 3, in the exemplary embodiment according to the present dimension, no adjusting disk 34 is provided. Instead, second limit stop 33 is configured directly on intake-side end face 50 of the connecting part that is configured as valve seat support 16. In the exemplary embodiment depicted in Figure 4, valve seat support 16 is made of a magnetic, in particular, ferritic material. In this context,  
20 it must be avoided that a significant magnetic flux flows from armature 11 into valve seat support 16 and then further directly into housing body 17, which closes the magnetic circuit as external pole 59, because this brings about a counterforce acting on armature 11 in the direction contrary to opening, thus reducing the magnetic opening force that is effectively exerted upon armature 11. Rather, care must be taken that the main magnetic flux flows  
25 directly from armature 11 into housing body 17, circumventing valve seat support 16. For this purpose, a magnetic restricter 56 is provided on valve seat support 16 directly in the fuel flow direction underneath end face 50 forming second limit stop 33, the restricter being formed by an annular groove 51. As a result of the constriction of the material of valve seat support 16 in the area of restricter 56, the magnetic flux at this location is weakened, so that the main  
30 flux overflows directly from armature 11 into housing body 17, i.e., in the reverse direction. A casing 52 is disposed between housing body 17 and armature 11 and valve seat support 16.

Figure 5 depicts the segment designated in Figure 4 as V and clarifies the circumstances



described above. It can be seen that secondary magnetic flux 53, which runs from housing body 17, acting as external magnetic pole 59, via valve seat support 16 to armature 11, is significantly weakened in comparison to main magnetic flux 58, which runs from housing body 17 directly to armature 11.

Figure 6 depicts a segment of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector 1 according to the present invention.

The exemplary embodiment depicted in Figure 6 is distinguished from the exemplary embodiment already described on the basis of Figures 4 and 5 by fact that valve seat support 16 is made of a nonmagnetic material, for example, a ceramic material or a plastic material. Because valve seat support 16 in this exemplary embodiment is made of a nonmagnetic material, no secondary magnetic flux is generated via valve seat support 16, so that restrictor 56 can be dispensed with.

Figure 7 depicts a detail of a third and fourth exemplary embodiment of a fuel injector 1 according to the present invention, also in a segment view of a cutaway representation. In this context, in the left half of Figure 7, a third exemplary embodiment is depicted, and in the right half of Figure 7, a fourth exemplary embodiment. In the third exemplary embodiment, depicted in the left half of Figure 7, valve seat support 16 takes over only the function of guiding armature 11 but not the function of the armature limit stop. For this purpose, on valve seat support 16, an armature guide 57 is provided, which cooperates with an armature shaft 60, which extends axially in the spray-discharge direction from an armature main body 61. Armature guide 57 is executed on the basis of reduced material strength, so that in this area a magnetic restrictor 56 results. Because armature 11 strikes not against valve seat support 16 but rather against another component not depicted in Figure 7, an axial gap 63 exists between armature guide 57 and end face 43 of armature 11, configured on main armature body 61. This axial gap 63 creates additional magnetic insulation of armature 11 from valve seat support 16, which in this exemplary embodiment can be made of a magnetic, i.e., ferritic, material.

In the fourth exemplary embodiment of a fuel injector 1 according to the present invention, depicted in the right half of Figure 7, armature 11 does indeed strike against intake-side end



What is claimed is:

1. A fuel injector (1) for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, having a solenoid coil (8), an armature (11) that can be acted upon by the solenoid coil (8) in a stroke direction in opposition to a first resetting spring (27), a valve needle (13) that is connected to a valve-closure member (14), the valve needle having a first limit stop (32) for the armature (11), the armature (11) additionally being acted upon by a second resetting spring (40), and having a connecting part (16), which supports a valve seat (15) that cooperates with the valve-closure member (14),

wherein

a stationary second limit stop (33) is provided for the armature (11), the second resetting spring (40) acts upon the armature (11) contrary to the stroke direction and, in a resting position when the solenoid coil (8) is not excited, the second resetting spring holds the armature (11) in position at the second limit stop (33) such that the armature (11) is positioned at a prestablished distance from the first limit stop (32), configured on the valve needle (13), the second limit stop (33) being configured on the connecting part (16) and the connecting part (16) being made of a magnetic material, and in the vicinity of the second limit stop (33), a magnetic restricter (56) is provided on the connecting part (16) and/or on the armature (11).

2. A fuel injector (1) for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, having a solenoid coil (8), an armature (11) that can be acted upon by the solenoid coil (8) in a stroke direction in opposition to a first resetting spring (27), a valve needle (13) that is connected to a valve-closure member (14), the valve needle having a first limit stop (32) for the armature (11), the armature (11) additionally being acted upon by a second resetting spring (40), and having a connecting part (16), which supports a valve seat (15) that cooperates with the valve-closure member (14),

wherein

a stationary second limit stop (33) is provided for the armature (11), and the second resetting spring (40) acts upon the armature (11) contrary to the stroke direction, and, in a resting position when the solenoid coil (8) is not excited, the second resetting spring

holds the armature (11) in position at the second limit stop (33) such that the armature (11) is positioned at a preestablished distance from the first limit stop (32) configured on the valve needle (13), the second limit stop (33) being configured on the connecting part (16), and the connecting part (16) being made of a nonmagnetic material.

3. The fuel injector as recited in Claim 1 or 2,  
wherein both an armature guide (57) as well as the second limit stop (33) are integrated in the connecting part (16).

4. The fuel injector as recited in Claim 3,  
wherein the armature (11) is configured such that it cooperates both with an external pole (59) as well as with the armature guide (57) and the second limit stop (33).

5. The fuel injector as recited in Claim 1,  
wherein the magnetic restricter (56) is arranged at the periphery of a segment of the armature (11) that is aligned with the valve needle (13).

6. The fuel injector as recited in one of the Claims 1 through 5,  
wherein, between the connecting part (16) and an external pole (59), a casing (52) made of a nonmagnetic material is arranged.


## Abstract

A fuel injector (1) for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, has a solenoid coil (8), an armature (11) that can be acted upon by the solenoid coil (8) in a stroke direction in opposition to a first resetting spring (27), and a valve needle (13) connected to a valve-closure member (14). The valve needle (13) has a first limit stop (32) for the movable armature (11), the armature (11) additionally being acted upon by a second resetting spring (40). In addition, a stationary second limit stop (33) is provided for the armature (11). The second resetting spring (40) acts upon the armature (11) contrary to the stroke direction and, in the resting position, when the solenoid coil (8) is not excited, the second resetting spring holds the armature (11) in position at the second limit stop (33) such that the armature (11) is at a preestablished distance from the first limit stop (32), which is configured on the valve needle (13). A connecting part (16) can be made of a magnetic material and can be configured as having a magnetic restricter (56), or it can be made of a nonmagnetic material.

(Figure 4)

FIG 1

Prior Art

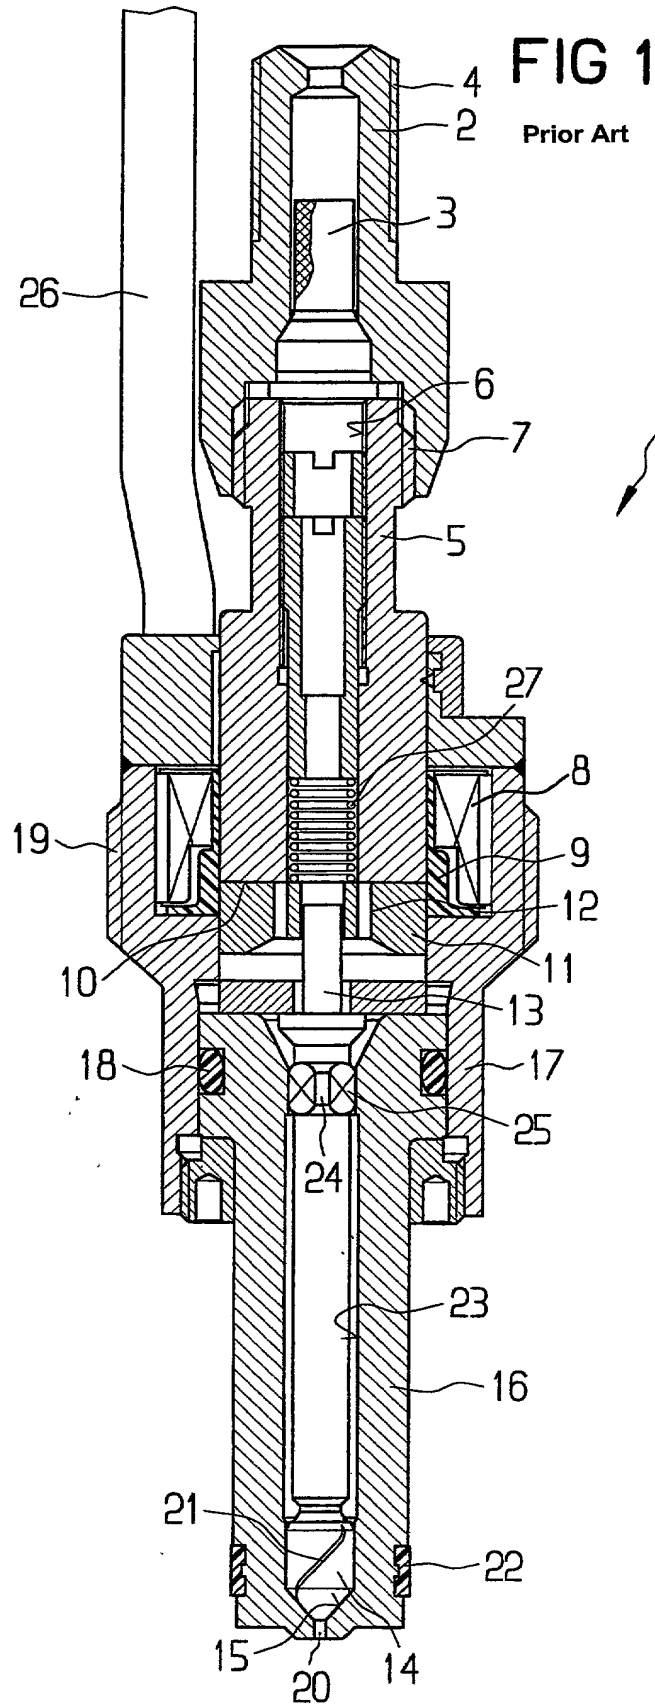

09856906.102501

FIG 2

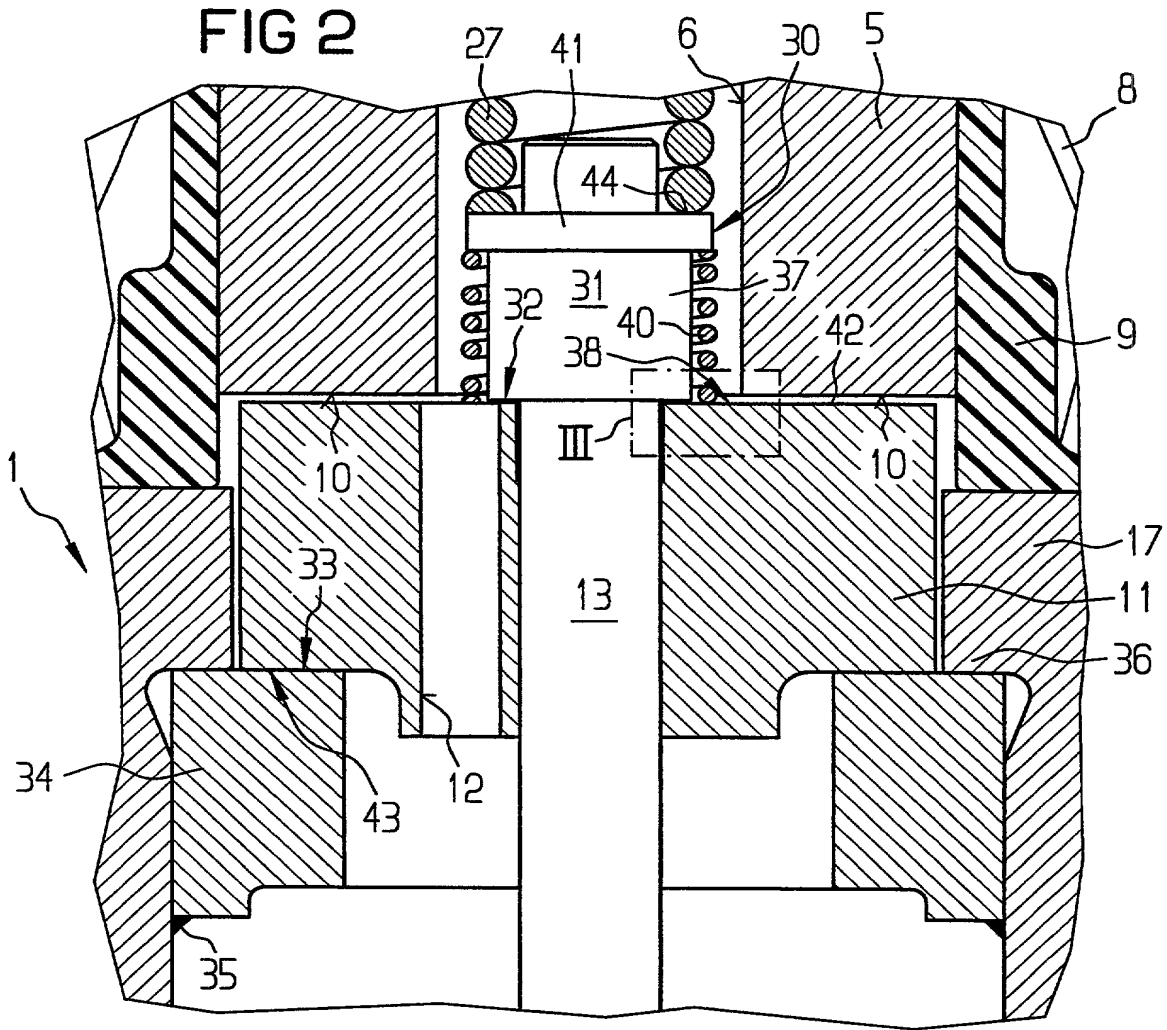


FIG 3

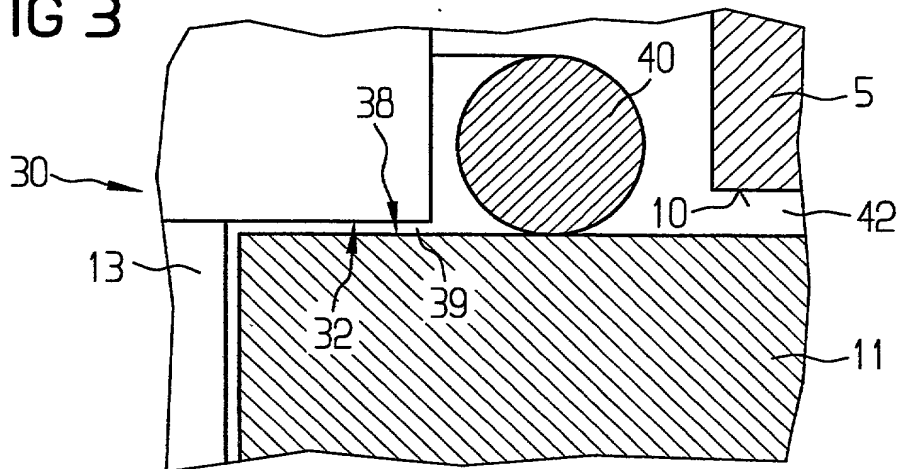


FIG 4

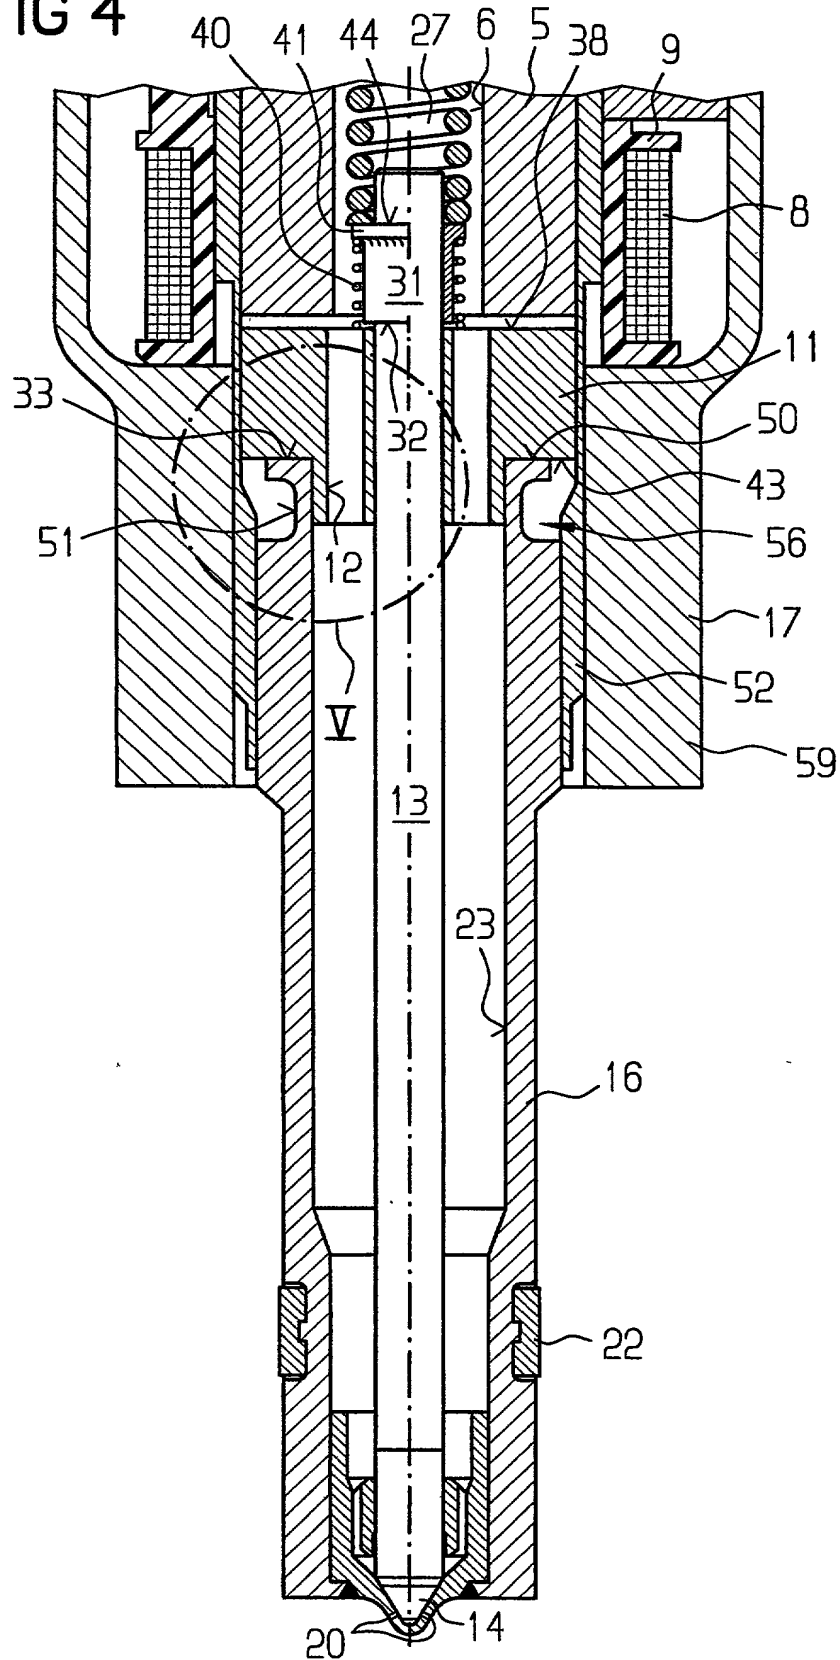




FIG 5

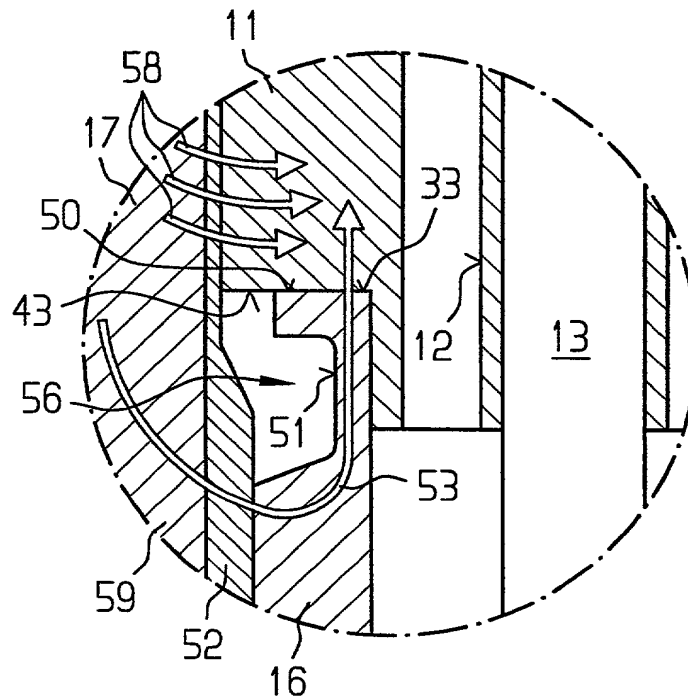


FIG 6


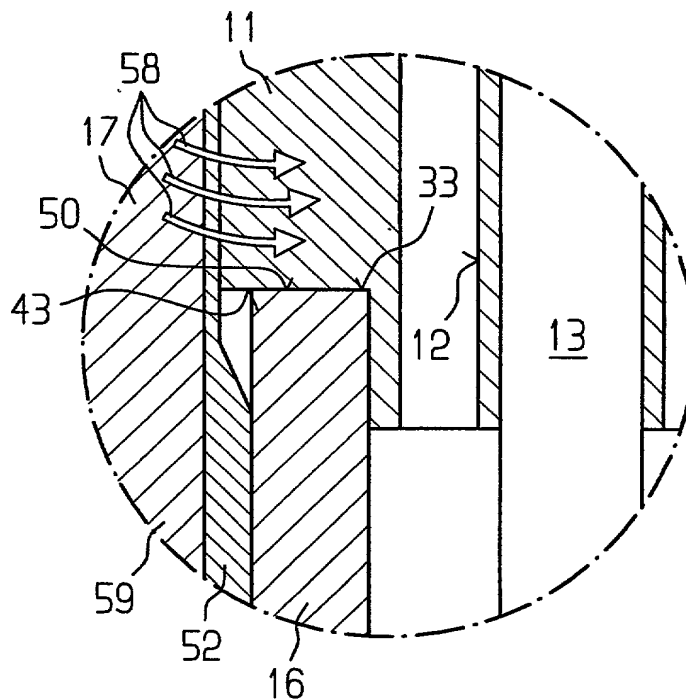


FIG 7



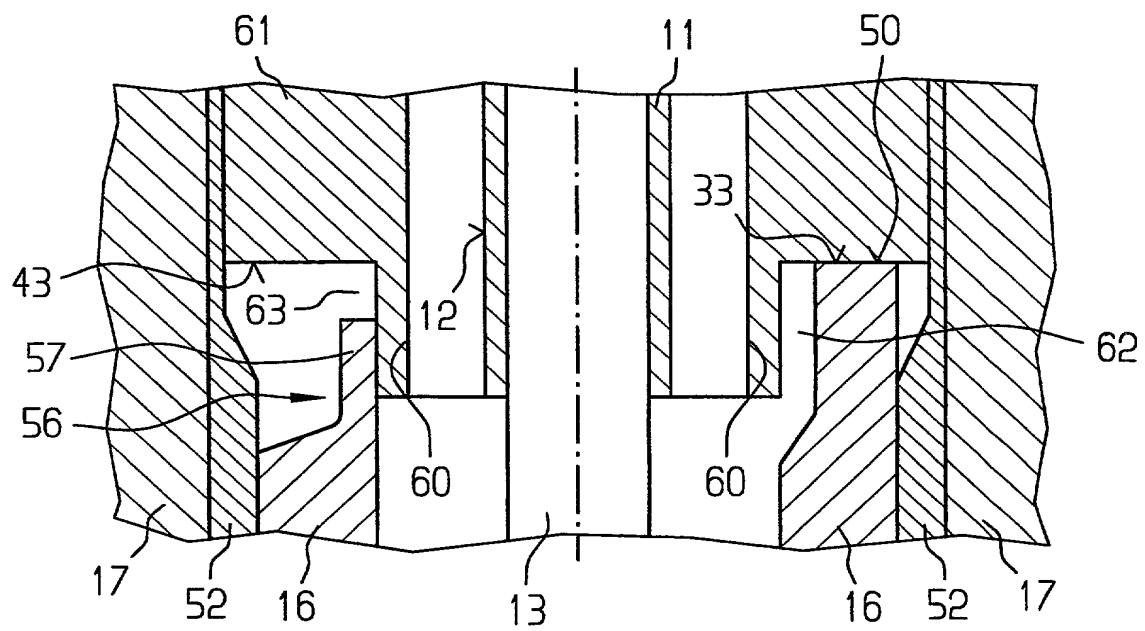

10191/1883

**COMBINED DECLARATION AND  
POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **FUEL INJECTOR**, and the specification of which:

- ☐ is attached hereto;
- ☐ was filed as United States Application Serial No. \_\_\_\_\_ on \_\_\_\_\_, 19\_\_ and was amended by the Preliminary Amendment filed on \_\_\_\_\_, 19\_\_.
- ☒ was filed as PCT International Application Number PCT/DE00/03422 on the 28<sup>th</sup> day of September, 2000.
- ☒ an English translation of which is filed herewith.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a). I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international applications(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

8L244508809  
~~EL245834291US~~

**PRIOR FOREIGN/PCT APPLICATION(S)  
AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119**

Country : Federal Republic of Germany

Application No. : 199 46 602.5

Date of Filing: September 29, 1999

Priority Claimed  
Under 35 U.S.C. § 119 : ☒ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code § 120 of any United States Application or PCT International Application designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

**PRIOR U.S. APPLICATIONS OR  
PCT INTERNATIONAL APPLICATIONS  
DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120**

**U.S. APPLICATIONS**

Number :

Filing Date :

**PCT APPLICATIONS  
DESIGNATING THE U.S.**

PCT Number :

PCT Filing Date :

I hereby appoint the following attorney(s) and/or agents to prosecute the above-identified application and transact all business in the Patent and Trademark Office connected therewith.

(List name(s) and registration number(s)):

|                    |                 |
|--------------------|-----------------|
| Richard L. Mayer,  | Reg. No. 22,490 |
| Gerard A. Messina, | Reg. No. 35,952 |
| _____              | Reg. No. _____  |
| _____              | Reg. No. _____  |

All correspondence should be sent to:

Richard L. Mayer, Esq.  
Kenyon & Kenyon  
One Broadway  
New York, New York 10004



Telephone No.: (212) 425-7200  
Facsimile No.: (212) 425-5288

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1 - 00 Full name of inventor: **Hubert STIER**

Inventor's signature Hubert Stier Date June, 11th, 2001

Citizenship Federal Republic of Germany

Residence Lindenweg 11  
71679 Asperg DE  
Federal Republic of Germany

Post Office Address Same as above

09256306-102501